

19



Europäisches Patentamt
European Patent Office
Office européen des brevets

11

Publication number:

0 150 882
A1

12

EUROPEAN PATENT APPLICATION

21

Application number: 85200069.4

51

Int. Cl.⁴: H 01 L 21/58, C 09 J 7/02

22

Date of filing: 24.01.85

30

Priority: 30.01.84 US 574815

71

Applicant: STAUFFER CHEMICAL COMPANY, Westport
Connecticut 06881 (US)

43

Date of publication of application: 07.08.85
Bulletin 85/32

72

Inventor: Aurichio, Joseph Anthony, Route 10,
Nottingham Way, Anderson, SC 29621 (US)

54

Designated Contracting States: BE CH DE FR GB IT LI
NL

74


Representative: Urbanus, Henricus Maria, Ir. et al, c/o
Vereenigde Octroolbureaux Nieuwe Parklaan 107,
NL-2587 BP 's-Gravenhage (NL)

54

Conductive die attach tape.

57

A conductive die attach type is described which allows for mounting of diced semiconductor chips thereon, followed by removal of the chip with an adherent conductive adhesive, and the mounting of the chip/adhesive combination in a chip carrier preparatory to the wire bonding operation.

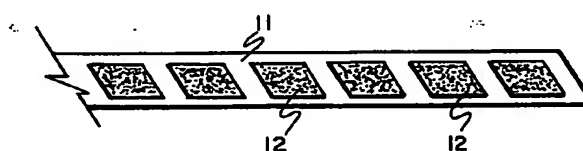

EP 0 150 882 A1

ACTORUM AG

BEST AVAILABLE COPY

- 1 -

CONDUCTIVE DIE ATTACH TAPEBackground of the Invention

Silicon wafers with multiple printed circuitry are diced (or sawed) into individual circuits (chips) by first placing the wafer onto a dicing film (a polymeric support film having a tacky surface) which holds the wafer in place during the dicing operation. The wafer is then partially cut through its thickness by the dicing implement (e.g., a diamond-impregnated wheel). The wafer is then cracked into individual chips and separated by stretching the support film. The chips are then picked up individually by a vacuum chuck to be placed onto the chip carrier (previously treated with adhesive to hold the chip). The adhesive is then cured to secure the chip into place and provide a ground for the chip during the step in which wires are bonded to the chip. There are a number of current methods of application of the adhesive to the chip carrier (e.g., use of syringe, use of stamp pad, use of other dispensing technique). Most methods cannot offer uniform adhesive thickness, and some are cumbersome and time consuming in application.

Summary of the Present Invention

The present invention is directed to a tape product which would provide the desired degree of adhesive

uniformity in terms of thickness and area of coverage to the chip. It comprises a support tape with a pattern of adhesive of a size and shape to support at least one semiconductor chip thereon. The individual chips would
5 be each positioned over a corresponding adhesive support and contacted therewith. After contact between chip and support film/adhesive has been made, the chip is removed from the film with its adherent adhesive support attached. This chip/adhesive composite can then be
10 placed into a suitable chip carrier and cured in an appropriate fashion. Afterwards, wires can be bonded to the chip as conventionally performed.

Description of the Drawings

15

The Drawings which form a portion of the present specification are descriptive of certain embodiments of the present invention wherein:

Fig. 1 is a perspective view of the conductive die
20 attach tape of the present invention; and

Fig. 2 is a cross-sectional view of a preferred embodiment of the invention wherein a release liner (or cover sheet) is affixed over the adhesive to protect it from contamination by foreign matter.

25

Detailed Description of the Present Invention

The present invention relates to a conductive die
30 attach tape comprising a support film and an adhesive pattern which can support a semiconductor chip prior to its removal (with attached adhesive) from the film and its placement in a suitable chip carrier.

The die attach tape of the present invention comprises a support film 11 with a suitable pattern of adhesive 12 and, in a preferred embodiment, a release liner 13 to protect the adhesive from contamination from foreign matter (e.g., dirt, dust, etc.). The adhesive 12 needs to release from the support film 11 when the chip/adhesive combination is removed therefrom. Therefore, it is generally desired that a suitable release layer be placed on the support film 11 to lie between it and the adhesive 12.

Representative support films 11 which can be used in the product of the present invention include paper as well as those made from such well known thermoplastic polymers as olefin polymers (e.g., polyethylene or polypropylene), vinyl halide polymers, and polyester. The thickness of the support film can range from about 12 to about 250 microns, with a thickness of about 50 to about 125 microns being preferred.

Coated on one side of the support film, in a preferred embodiment, is a suitable release layer which, as will be mentioned below, allows for easy separation of the conductive adhesive/chip combination from the support film 11 prior to placement in the chip carrier. Representative release layers can comprise silicone and fluorocarbon compositions such as those described in the prior art (e.g., in U.S. Patent Nos. 3,912,569 and 3,575,917 to A. M. Kapral). These release layers need only be thick enough to confer the desired release properties (e.g., from about 0.23 to about 0.91 kg. per ream). If the surface of the support film has an inherent release layer function (polyfluorocarbon), the inherent release characteristics of its surface can be

utilized in accordance with the present invention as the "release layer". A commercial source of suitable silicone release coated polymeric film (e.g., polypropylene with SILOX brand release coating) is Akrosil Corporation of Menasha, Wisconsin.

It is also possible to dispense with the release layer if polymers having a release feature upon heating are used. For example, a polyolefin film 11, such as polypropylene, can be heated (e.g., for 0.25-3 minutes at 45°C.-70°C.) after the chip and adhesive are bonded to one another to insure later clean release of the chip/adhesive composite.

Attached to the exposed surface of the release layer (or the film 11, if no release layer is used) is a suitable pattern of conductive adhesive 12 to form a point of attachment for the semiconductor chips that are to be later transferred to a chip carrier. Generally, the conductive adhesive pattern can comprise a series of square adhesive patterns of a suitable size and a suitable shape to approximate the area of the chip to be mounted thereon. The thickness of the adhesive can range from about 5 microns to about 75 microns. Suitable conductive adhesive compositions which can be utilized include those adhesive materials which are loaded with fillers to effect conductivity requirements (e.g., 2% to about 90%, by weight of a suitable conductive material). Representative conductive materials include finely divided conductive metals (e.g., aluminum, copper, silver, gold, palladium), or carbon black. Representative adhesive materials which can form a matrix for the conductive materials include polyimide,

acrylic, epoxy, silicones, and various modified polymeric materials to meet desired thermal and conductivity requirements. One suitable adhesive is a silver filled polyimide (P-1011 brand from Epoxy Technology, Inc.).

5 In a preferred embodiment, the film product of the present invention also includes a suitable release liner 13 over the exposed surface of the adhesive to protect it from contamination and/or damage (e.g., inadvertent destruction of the preferred, substantially flat upper surface). For example, release coated paper can be employed as the release liner material. The release liner can have a differing release characteristic than the release layer if a release layer is used on the support film 11.

15 The film of the present invention can be formed using conventional lamination and printing operations. The release layer can, for example, be coated onto the support film by using conventional coating techniques followed by drying of the layer. The pattern of conductive adhesive is then applied to the dried release layer surface by appropriate printing procedures, e.g., screen printing or stamping processes, and then the adhesive is transferred to the support film 12 by lamination. If a release liner is desired over the exposed surface of the adhesive, it can also be applied by conventional lamination procedures.

What is Claimed:

1. A conductive die attach tape useful in releas-
ably supporting semiconductor chips on a conductive
5 adhesive which comprises:
 - (a) a support film; and
 - (b) a pattern of conductive adhesive releasably
affixed to one side of the support film, the
adhesive pattern being of a size and shape
10 to support at least one semiconductor chip
thereon.
2. A tape as claimed in Claim 1 in which the sup-
port film is formed of a polyolefin polymer.
3. A tape as claimed in Claim 1 wherein the sup-
15 port film is polyethylene.
4. A tape as claimed in Claim 1 wherein the sup-
port film has a thickness of from about 12 microns to
about 250 microns.
5. A tape as claimed in Claim 1 which further com-
20 prises a release layer on the film between it and the
adhesive.
6. A tape as claimed in Claim 5 wherein the release
layer comprises a silicone composition.
7. A tape as claimed in Claim 5 wherein the release
25 layer comprises a fluorocarbon composition.
8. A tape as claimed in Claim 1 wherein the con-
ductive adhesive has a thickness of from about 5
microns to about 75 microns.
9. A tape as claimed in Claim 1 wherein the con-
30 ductive adhesive contains an effective amount for
conductivity of a conductive metal in an adhesive matrix.

10. A tape as claimed in Claim 2 wherein the support film has a thickness of from about 12 microns to about 250 microns.

5 11. A tape as claimed in Claim 9 which has a release layer on the film between it and the adhesive, said release layer comprising a silicone composition.

10 12. A tape as claimed in Claim 11 having a conductive adhesive of a thickness of from about 5 microns to about 75 microns and wherein the adhesive contains an effective amount for conductivity of a conductive metal in an adhesive matrix.

13. A tape as claimed in Claim 1 which also has a release liner over the pattern of conductive adhesive.

15 14. A film as claimed in Claim 12 which also has a release liner over the pattern of conductive adhesive.

15. In combination, a semiconductor chip and the tape product of Claim 1.

16. In combination, a semiconductor chip and the tape product of Claim 2.

20 17. In combination, a semiconductor chip and the tape product of Claim 3.

18. In combination, a semiconductor chip and the tape product of Claim 4.

25 19. In combination, a semiconductor chip and the tape product of Claim 5.

20. In combination, a semiconductor chip and the tape product of Claim 6.

21. In combination, a semiconductor chip and the tape product of Claim 7.

30 22. In combination, a semiconductor chip and the tape product of Claim 8.

23. In combination, a semiconductor chip and the tape product of Claim 9.

24. In combination, a semiconductor chip and the tape product of Claim 10.

25. In combination, a semiconductor chip and the tape product of Claim 11.

5 26. In combination, a semiconductor chip and the tape product of Claim 12.

27. A method of mounting a semiconductor chip in a chip carrier which comprises bonding the chip to the tape product of Claim 1, thereafter removing the chip and adherent conductive adhesive from the support film, and bonding the chip and adherent conductive adhesive to a chip carrier.

10 28. A method of mounting a semiconductor chip in a chip carrier which comprises bonding the chip to the tape product of Claim 2, thereafter removing the chip and adherent conductive adhesive from the support film, and bonding the chip and adherent conductive adhesive to a chip carrier.

15 29. A method of mounting a semiconductor chip in a chip carrier which comprises bonding the chip to the tape product of Claim 3, thereafter removing the chip and adherent conductive adhesive from the support film, and bonding the chip and adherent conductive adhesive to a chip carrier.

20 30. A method of mounting a semiconductor chip in a chip carrier which comprises bonding the chip to the tape product of Claim 4, thereafter removing the chip and adherent conductive adhesive from the support film, and bonding the chip and adherent conductive adhesive to a chip carrier.

25 31. A method of mounting a semiconductor chip in a chip carrier which comprises bonding the chip to the

tape product of Claim 5, thereafter removing the chip and adherent conductive adhesive from the support film, and bonding the chip and adherent conductive adhesive to a chip carrier.

5 32. A method of mounting a semiconductor chip in a chip carrier which comprises bonding the chip to the tape product of Claim 6, thereafter removing the chip and adherent conductive adhesive from the support film, and bonding the chip and adherent conductive adhesive
10 to a chip carrier.

 33. A method of mounting a semiconductor chip in a chip carrier which comprises bonding the chip to the tape product of Claim 7, thereafter removing the chip and adherent conductive adhesive from the support film,
15 and bonding the chip and adherent conductive adhesive to a chip carrier.

 34. A method of mounting a semiconductor chip in a chip carrier which comprises bonding the chip to the tape product of Claim 8, thereafter removing the chip and adherent conductive adhesive from the support film,
20 and bonding the chip and adherent conductive adhesive to a chip carrier.



 35. A method of mounting a semiconductor chip in a chip carrier which comprises bonding the chip to the tape product of Claim 9, thereafter removing the chip and adherent conductive adhesive from the support film,
25 and bonding the chip and adherent conductive adhesive to a chip carrier.

 36. A method of mounting a semiconductor chip in a chip carrier which comprises bonding the chip to the tape product of Claim 10, thereafter removing the chip and adherent conductive adhesive from the support film,
30 and adherent conductive adhesive from the support film,

and bonding the chip and adherent conductive adhesive to a chip carrier.

5 37. A method of mounting a semiconductor chip in a chip carrier which comprises bonding the chip to the tape product of Claim 11, thereafter removing the chip and adherent conductive adhesive from the support film, and bonding the chip and adherent conductive adhesive to a chip carrier.

10 38. A method of mounting a semiconductor chip in a chip carrier which comprises bonding the chip to the tape product of Claim 12, thereafter removing the chip and adherent conductive adhesive from the support film, and bonding the chip and adherent conductive adhesive to a chip carrier.

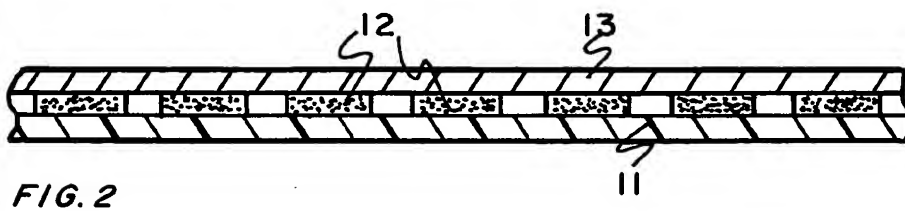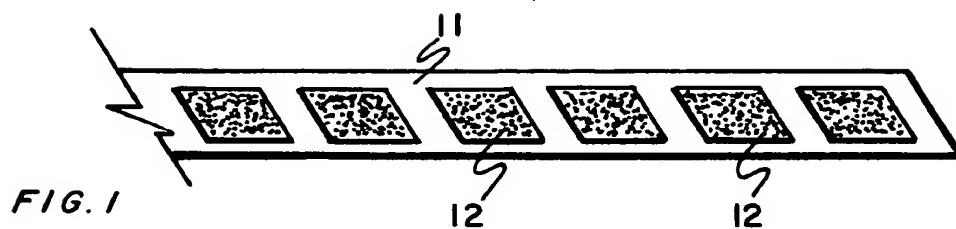



European Patent
Office

EUROPEAN SEARCH REPORT

0150882

Application number

EP 85 20 0069

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.4)
A	DD-A- 158 076 (VEB ZFT MIKROELEKTRONIK) * Claim 1; figures 1-5 *	1, 15	H 01 L 21/58 C 09 J 7/02
A	EP-A-0 032 728 (SIEMENS) * Claim 1 *	1, 9	
A, D	US-A-3 912 569 (KAPRAL) * Claim 5 *	5-7	
			TECHNICAL FIELDS SEARCHED (Int. Cl.4)
			C 09 J 7/02 H 01 L 21/58 H 01 L 21/60
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 09-04-1985	Examiner GIBBS C.S.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.